

PROPOSAL FOR DRAFT AMENDMENTS TO REGULATION No. 52

Corrigendum to document TRANS/WP.29/GRSG/2002/6

(Transmitted by the Expert from Germany)

Paragraph 5.7.8.1.3.2., amend to read:


"5.7.8.1.3.2. Intrusion of a structural member provided that the intrusion is included within a triangle whose peak is situated ~~65 cm from the floor~~ **70 cm from the top** and whose base is 10 cm in width and situated in the upper part of the space in question, adjacent to the side wall of the vehicle (see annex 3, figure 7)."

Annex 3, figure 7, amend to read:

"Figure 7

Permitted intrusion of a structural member

(see paragraph 5.7.8.1.3.2.)

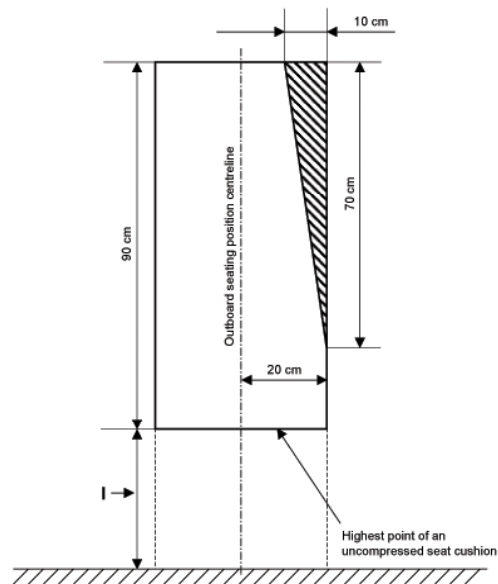

I (cm) min.
40-50
(35 cm at wheel arches and engine compartment)

Justification:

The alteration corrects figure 7.

The requirements of figure 14: I (cm) min 40 - 50 (35 cm at wheel arches and engine compartment) are transferred to figure 7 to make it clear that the general prescriptions of paragraph 5.7.8.3. apply also to paragraph 5.7.8.1.3.2.

As there are different values for "I" the former method to define the starting point for the triangle representing the permitted intrusion needs to be revised, in order to establish equal conditions for all of the different values. This is achieved by measuring from the top of the minimum height above the seat and leaving the geometry of the triangle unchanged.