



**Economic and Social
Council**

Distr.
GENERAL

TRANS/WP.29/999
2 April 2004

ENGLISH
Original: ENGLISH AND FRENCH

ECONOMIC COMMISSION FOR EUROPE

INLAND TRANSPORT COMMITTEE

World Forum for Harmonization of Vehicle Regulations (WP.29)

DRAFT SUPPLEMENT 10 TO THE 03 SERIES OF AMENDMENTS
TO REGULATION No. 36

(Large capacity passenger vehicles)

Note: The text reproduced below was adopted by the Administrative Committee (AC.1) of the amended 1958 Agreement at its twenty-sixth session, following the recommendation by WP.29 at its one-hundred-and-thirty-second session. It is based on document TRANS/WP.29/2004/20, not amended (TRANS/WP.29/992, para. 79).

Paragraph 5.7.8.5.1., amend to read:

"5.7.8.5.1. For a seat behind a partition or other rigid structure other than a seat, a minimum clear space in front of each passenger seat shall be provided as shown in annex 3, figure 8. A partition whose contour corresponds approximately to that of the inclined seat back may intrude into this space as provided by paragraph 5.7.8.4."

Insert a new paragraph 5.7.8.5.2., to read:

"5.7.8.5.2. For a seat behind a seat and/or a seat facing the gangway, a minimum clear foot space of at least 300 mm depth and a width according to paragraph 5.7.8.1.1., shall be provided as shown in annex 3, figure 6b. The local presence in this space of seat legs and of intrusions as provided by paragraph 5.7.8.6.2.3. shall be permitted provided that adequate space remains for the passengers' feet. This foot space may partly be situated in and/or above the gangway but shall not create any obstruction when measuring the minimum gangway-width in accordance with paragraph 5.7.5."

Paragraph 5.7.8.5.2., renumber as paragraph 5.7.8.5.3.


Annex 3.

Figure 6. renumber as Figure 6a.

Insert a new figure 6b, to read:

"Figure 6b

SPACE FOR SEATED PASSENGERS BEHIND A SEAT AND/ OR A SEAT FACING THE
GANGWAY
(see paragraph 5.7.8.5.2)

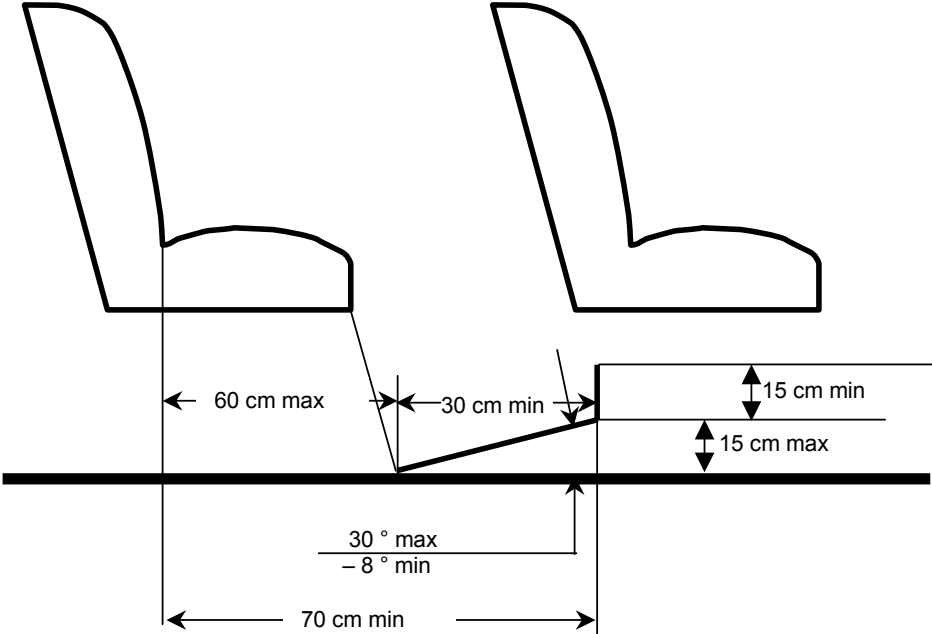

"

Figure 8, amend the title to read:

"Figure 8

SPACE FOR SEATED PASSENGERS BEHIND A PARTITION OR OTHER RIGID
STRUCTURE OTHER THAN A SEAT
(see paragraph 5.7.8.5.1)"
