UNITED NATIONS



Economic and Social Council

Distr.

GENERAL

TRANS/WP.29/GRSP/2005/4 7 March 2005

Original: ENGLISH

ENGLISH AND FRENCH ONLY

ECONOMIC COMMISSION FOR EUROPE

INLAND TRANSPORT COMMITTEE

World Forum for Harmonization of Vehicle Regulations (WP.29)

Working Party on Passive Safety (GRSP) (Thirty-seventh session, 23-27 May 2005, agenda item B.1.1.)

PROPOSAL FOR DRAFT CORRIGENDUM TO THE 06 SERIES OF AMENDMENTS TO REGULATION No. 14 (Safety-belts anchorages)


Transmitted by the expert from the United States of America

Note: This document is distributed, according to the request of GRSP (TRANS/WP.29/GRSP/36, para. 12 and TRANS/WP.29/GRSP/34, para.16. It is based on the text of informal document No. GRSP-36-12.

Note: This document is distributed to the Experts on Passive Safety only.

Annex 9, Figure 6

For the existing figure substitute

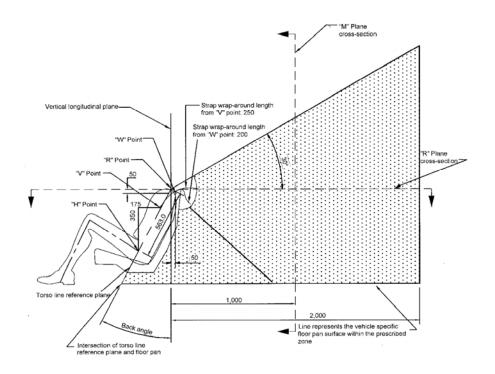


Notes

- 1. Dimensions in mm, except where otherwise indicated
- Portion of user-ready tether anchorage that is designed to bind with the tether strap hook to be located within shaded zone
- 3. Drawing not to scale
- 4. "R" Point: Shoulder reference point
- "V" Point: V-reference point, 350 mm vertically above and 175 mm horizontally back from H-point
- 6. "W" Point: W-reference point, 50 mm vertically below and 50 mm horizontally back from "R" Point
- 7. "M" Plane: M-reference plane, 1 000 mm horizontally back from "R" Point

Figure 6: ISOFIX Top tether anchorage location, ISOFIX zone – Side view

Figure 7
For the existing figure substitute

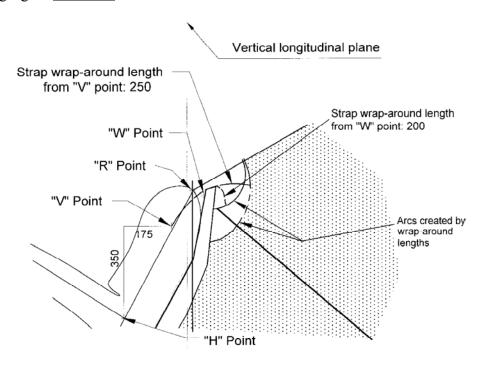

Notes

- 1. Dimensions in mm, except where otherwise indicated
- Portion of user-ready tether anchorage that is designed to bind with the tether strap hook to be located within shaded zone
- 3. Drawing not to scale
- 4. "R" Point: Shoulder reference point
- 5. "V" Point: V-reference point, 350 mm vertically above and 175 mm horizontally back from H-point
- 6. "W" Point: W-reference point, 50 mm vertically below and 50 mm horizontally back from "R" Point
- 7. "M" Plane: M-reference plane, 1 000 mm horizontally back from "R" Point

Figure 7: ISOFIX Top tether anchorage location, ISOFIX zone Enlarged view of wrap-around area