

6.4.2. Mechanical Integrity

This test applies only to the REESS intended to be installed in vehicles of category M1 and N1.

At the manufacturer's choice the test may be performed as, either

- (a) vehicle based tests in accordance with paragraph 6.4.2.1 of this Regulation or
- (b) component based tests in accordance with paragraph 6.4.2.2 of this Regulation.

6.4.2.1 Vehicle based test

At the manufacturer's choice, the test may be performed as either

- (a) vehicle based dynamic tests in accordance with paragraph 6.4.2.1.1 of this Regulation, or
- (b) vehicle based static tests in accordance with paragraph 6.4.2.1.2 of this Regulation, or
- (c) any combination of (a) and (b) above, for different direction of vehicle travel.

The approval of a REESS tested under this paragraph shall be limited to the specific vehicle type.

6.4.2.1.1 Vehicle based dynamic test

Compliance with the requirements of the acceptance criteria of Paragraph 6.4.2.3 below may be demonstrated by REESS(s) installed in vehicles that have been subjected to a vehicle crash test in accordance with UNECE regulations ECE R12 Annex 3 or ECE R94 Annex 3 for frontal impact, and ECE R95 Annex 4 for side impact. The ambient temperature and the SOC shall be in accordance with the said Regulation.

6.4.2.1.2 Vehicle based static test

The test shall be conducted in accordance with Annex 8D of this Regulation.

The crush load defined in Paragraph 3.2. of Annex 8D of this Regulation may be replaced by the contact force according to ECE-R12 Annex 3 or ECE R94 Annex 3 in the direction of travel and with the mechanical load according to ECE R95 Annex 4 in the direction horizontally perpendicular to the direction of travel. The contact force shall be determined by the vehicle manufacturer using test or simulation data and agreed by the Technical Service.

The manufacturer may define the relevant parts of the vehicle structure used for the mechanical protection of the REESS components. The test shall be conducted with the REESS mounted to this vehicle structure in a way which is representative of its mounting in the vehicle.

6.4.2.2 Component based test

The test shall be conducted in accordance with Annex 8D of this Regulation.

RESS approved according to this paragraph shall be mounted at a position where the horizontal distance parallel to the centre line of the vehicle from the foremost edge to the front edge of the motor vehicle is more than 420 mm and at a position where the horizontal distance parallel to the centre line of the vehicle from the rearmost edge to the rear edge of the motor vehicle is more than 300 mm. The mounting restrictions shall be documented in Annex 6 - Part 2.

6.4.2.3 Acceptance criteria

During the test there shall be no evidence of:

- (a) fire
- (b) explosion
- (c) electrolyte leakage if tested according to 6.4.2.2

- (d) any spillage of electrolyte leakage into the passenger compartment and no more than 7 per cent of electrolyte shall spill from the REESS except open type traction batteries outside the passenger compartment. For open type traction batteries no more than 7 per cent with a maximum of 5.0 liters shall spill outside the passenger compartment.

The isolation resistance of the Tested-Device shall ensure at least 100 Ω /Volt for the whole REESS measured in accordance with Annex 4A, or the protection degree IPXXB shall be fulfilled for the Tested-Device.

Compliance with the requirements of a) to c) of this paragraph shall be confirmed by visual inspection.

To confirm compliance to d) of this paragraph appropriate coating shall be applied, if necessary, to the physical protection in order to confirm any electrolyte leakage from the RESS after the impact test. Unless the manufacturer provides means to differentiate between the leakage of different liquids, all liquid leakage shall be considered as the electrolyte.

Annex 8D

Mechanical integrity

1. PURPOSE

The purpose of this test is to verify the safety performance of the REESS under contact loads which may occur during vehicle crash situation.

2. INSTALLATIONS

2.1 This test shall be conducted either with the complete REESS or with related subsystems of the REESS including the cells and their electrical connections. If the electronic management unit for the REESS is not integrated, such control unit may not be installed on the device under test by the discretion of the manufacturer.

2.2 The Tested-Device shall be connected to the test fixture as recommended by the manufacturer.

3. PROCEDURES

3.1. General test conditions


The following condition shall apply to the test:

- a) the test shall be conducted under a standard ambient temperature of 20 ± 10 °C.
- b) at the beginning of the test, the SOC shall be adjusted to a value in the upper 50% of the normal operating state of charge range.
- c) at the beginning of the test, all protection devices which effect the function of the Tested-Device and which are relevant for the outcome of the test shall be operational.

3.2. Crush test

3.2.0. Crush Plate

Figure 7:

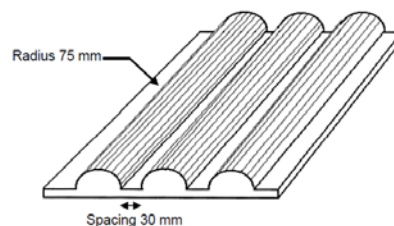

Dimension of the crush plate:
600 mm x 600 mm or smaller

3.2.1. Crush force

The Tested-Device shall be crushed between a resistance and a crush plate as described in figure 7 with a force of at least 100 kN, but not exceeding 105 kN with an onset time less than 3 minutes and a hold time of at least 100 ms and not exceeding 10s.

A higher crush force, a longer onset time, a longer hold time, also in combination, may be applied at the request of the manufacturer.

The application of the force shall be decided by the manufacturer together with the technical service in recommendation with regard to direction of travel and horizontally perpendicular to the direction of travel of the RESS.

After the release of the load, the Tested-Device shall be observed for 1 h at the ambient temperature conditions of the test environment. The test ends after the observing time

3.2.2. Crush force with further mounting restrictions to the REESS

For REESS which mounting location in the vehicle is restricted to and described as follows.

- not more than 400 mm ahead from the R point of the vehicle

and

- not more than 400 mm to the rear from the R point of the vehicle or more than 600 mm away from the rearmost rear edge of the vehicle

and

- at a position within more than 200 mm from the longitudinal chassis frame

No contact force shall be applied.

The mounting restrictions shall be documented in Annex 6 - Part 2.

Annex 6 - Part 2

ESSENTIAL CHARACTERISTICS OF REESS

- 3. **REESS**
- 3.1. Trade name and mark of the REESS:
- 3.2. Indication of all types of cells:
- 3.2.1 The cell chemistry:
- [3.2.2 Physical dimensions:]
- 3.3. Description or drawing(s) or picture(s) of REESS explaining:.....
- 3.3.1 Structure:
- 3.3.2 Configuration (number of cells, mode of connection, etc.):.....
- 3.3.3 Dimensions:
- 3.3.4.4 Enclosures:
- 3.4 Electrical specification
- 3.4.1 Nominal voltage (V):
- 3.4.2 Working voltage (V):.....
- 3.4.3. Capacity (Ah):
- 3.4.4 Maximum current (A):
- 3.5. Gas combination rate (in per cent):
- 3.6 Description or drawing(s) or picture(s) of the installation of the REESS in the vehicle **(including mounting restrictions according to paragraph 6.4.2.2.):**
- 3.6.1 Physical support:
- 3.7 Type of thermal management:
- 3.8 Electronic control:
- 3.9. Category of vehicles which the REESS can be installed:.....

Definition.

“R’ point” or "seating reference point" means a design point defined by the vehicle manufacturer for each seating position and established with respect to the three-dimensional reference system;

(ECE-R95)