



Economic and Social Council

Distr.: General
20 December 2021

Original: English

Economic Commission for Europe

Inland Transport Committee

World Forum for Harmonization of Vehicle Regulations

186th session

Geneva, 8-11 March 2022

Item 4.14.1 of the provisional agenda

Proposal for amendments to the Consolidated Resolution on the common specification of light source categories (R.E.5)

Proposal for amendment 8 to the Consolidated Resolution on the common specification of light source categories (R.E.5)

Submitted by the Working Party on Lighting and Light-Signalling*

The text reproduced below was adopted by the Working Party on Lighting and Light-Signalling (GRE) at its eighty-fifth session (ECE/TRANS/WP.29/GRE/85, para. 29). It is based on ECE/TRANS/WP.29/GRE/2021/24. It is submitted to the World Forum for Harmonization of Vehicle Regulations (WP.29) and to the Administrative Committee (AC.1) for consideration at their March 2022 sessions.

* In accordance with the programme of work of the Inland Transport Committee for 2022 as outlined in proposed programme budget for 2022 (A/76/6 (part V sect. 20) para 20.76), the World Forum will develop, harmonize and update UN Regulations in order to enhance the performance of vehicles. The present document is submitted in conformity with that mandate.



The Status table, add a new row at the end to read:

"Status table

This consolidated version of this Resolution contains all provisions and amendments adopted so far by the World Forum for Harmonization of Vehicle Regulations (WP.29) and is valid from the date as indicated in the following table until the date on which the next revision of this Resolution becomes valid:

Version of the Resolution	Date * as from which the version is valid	Adopted by WP.29		Clarification
		Session No.	Amendment document No.	
1 (Original)	22.06.2017	170	ECE/TRANS/WP.29/2016/111	Based upon Annexes 1 of Regulations: <ul style="list-style-type: none"> • No. 37, up to and including Supplement 44 • No. 99, up to and including Supplement 11 • No. 128, up to and including Supplement 5
...
8	11.03.2022	186	ECE/TRANS/WP.29/2022/44	Amended detail in filament light source sheets: H8/3, H9/3, H11/3, H16/3, and T4W/1 Amended detail in LED light source sheets: L1/2, Lx3/2, LR4/2, and Lx5/2 Introduction of new LED light source categories LR6A and LR6B

* This date is the date of adoption of the amendment to the Resolution by WP.29 or the date of entering into force of an amendment to UN Regulation No. 37, 99 or 128 adopted by AC.1 as a package with the amendment to the Resolution in the same session of WP.29.

Paragraph 3.3.,

Group 2, amend to read:

"

Group 2			
LED light source categories only for use in signalling lamps, cornering lamps, reversing lamps and rear registration plate lamps:			
	Category		Sheet number(s)
	LR1		LR1/1 to 5
	LW2	2	LW2/1 to 5
	LR3A		Lx3/1 to 6
	LR3B		Lx3/1 to 6
	LW3A	2	Lx3/1 to 6
	LW3B	2	Lx3/1 to 6
	LY3A		Lx3/1 to 6
	LY3B		Lx3/1 to 6
	LR4A		LR4/1 to 5
	LR4B		LR4/1 to 5
	LR5A		Lx5/1 to 6
	LR5B		Lx5/1 to 6
	LW5A	2	Lx5/1 to 6
	LW5B	2	Lx5/1 to 6
	LY5A		Lx5/1 to 6

<i>Group 2</i>			
<i>LED light source categories only for use in signalling lamps, cornering lamps, reversing lamps and rear registration plate lamps:</i>			
	<i>Category</i>		<i>Sheet number(s)</i>
	LY5B		Lx5/1 to 6
	LR6A		Lx6/1 to 6
	LR6B		Lx6/1 to 6

¹ Not for use in conformity of production control of lamps.

² Not for use behind red and amber lenses"

Annex 1,

Sheet H8/3, table, amend to read:

"...

Cap:	H8: PGJ19-1	in accordance with IEC Publication 60061 (sheet 7004-110-3)
	H8B:PGJY19-1	in accordance with IEC Publication 60061 (sheet 7004-146-1)

..."

Sheet H9/3, table, amend to read:

"...

Cap:	H9: PGJ19-5	in accordance with IEC Publication 60061 (sheet 7004-110-3)
	H9B:PGJY19-5	in accordance with IEC Publication 60061 (sheet 7004-146-1)

..."

Sheet H11/3, table, amend to read:

"...

Cap:	H11: PGJ19-2	in accordance with IEC Publication 60061 (sheet 7004-110-3)
	H11B:PGJY19-2	in accordance with IEC Publication 60061 (sheet 7004-146-1)

..."

Sheet H16/3, table, amend to read:

"...

Cap:	H16: PGJ19-3	in accordance with IEC Publication 60061 (sheet 7004-110-3)
	H16B: PGJY19-3	in accordance with IEC Publication 60061 (sheet 7004-146-1)

..."

Sheet T4W/1, table, amend to read:

"...

Cap BA9s in accordance with IEC Publication 60061 (sheet 7004-14-10)
--

..."

Annex 3,

List of sheets for LED light sources and their sequence, amend to read:

"

Sheet number(s)

C5W/LED/1 to 4

H11/LED/1 to 7

L1/1 to 5

LR1/1 to 5

Sheet number(s)

- LW2/1 to 5
- Lx3/1 to 6
- LR4/1 to 5
- Lx5/1 to 6
- Lx6/1 to 6
- PY21W/LED/1 to 4
- R5W/LED/1 to 4
- W5W/LED/1 to 4

"

Sheet L1/2, Table 1, amend to read:

"...

Cap PGJ18.5d-29 in accordance with IEC Publication 60061 (sheet 7004-185-3)¹⁰

..."

Sheet Lx3/2, Table 1, amend to read:

"...

LR3A, LR3B	PGJ18.5d-1	
Cap LW3A, LW3B	PGJ18.5d-24	in accordance with IEC Publication 60061 (sheet 7004-185-3)
LY3A, LY3B	PGJ18.5d-15	

..."

Sheet Lx3/2, Table 1, footnote 13, amend to read:

"

^{13/} Light centre length, for the method of measurement, see Annex K of IEC Publication 60809, Edition 4.

"

Sheet LR4/2, Table 1, amend to read:

"...

Cap PGJ18.5t-5 in accordance with IEC Publication 60061 (sheet 7004-185-3)

..."

Sheet Lx5/2, Table 1, amend to read:

"...

LR5A, LR5B	PGJ18.5d-10	
Cap LW5A, LW5B	PGJ18.5d-28	in accordance with IEC Publication 60061 (sheet 7004-185-3)
LY5A, LY5B	PGJ18.5d-19	

..."

Sheet Lx5/2, Table 1, footnote 11, amend to read:

"


^{11/} Light centre length, for the method of measurement, see Annex K of IEC Publication 60809, Edition 4.

"


After sheet Lx5/6, insert new sheets Lx6/1 to 6, to read (see following pages; one page per sheet):

The drawings are intended only to illustrate the essential dimensions of the LED light source.


Figure 1*
Main Drawing

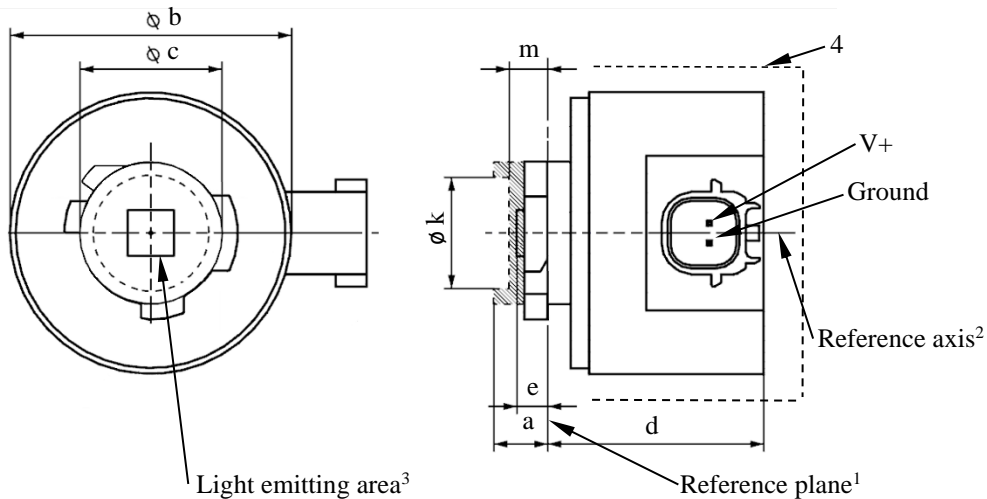

LR6A

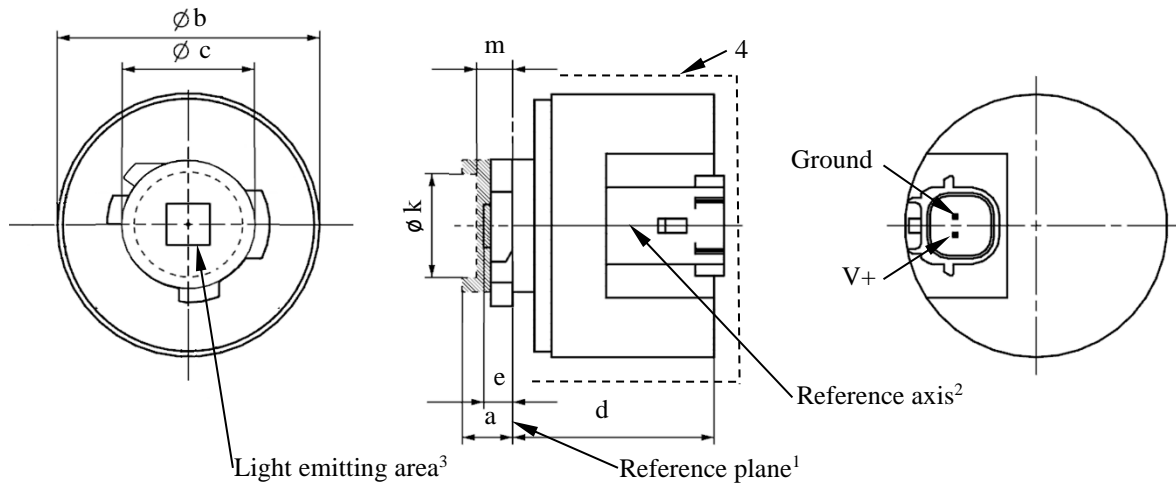

LR6B

* Projection method: 

For the notes see sheet Lx6/2

Table 1
Essential dimensional, electrical and photometric characteristics of the LED light source

Dimensions		Production LED light sources	Standard LED light sources
a	mm	6.0 max.	
b	mm	c + 10.0 min. 38.0 max.	
c	mm	18.5 ± 0.1	
d	mm	28.0 max.	
e ^{8/}	mm	3.0 ± 0.30	3.0 ± 0.15
k ^{9/}	mm	7.5 min.	
m ^{9/}	mm	4.0 max.	
Cap	LR6A, LR6B	PGJ18.5d-33	in accordance with IEC Publication 60061 (sheet 7004-185-3)
<i>Electrical and photometric characteristics</i>			
Rated values	Volts	12	
	Watts	7	
Test voltage	Volts (DC)	13.5	
Objective Values ⁶	Watts (at test voltage)	8 max.	
	Luminous flux (in lm at test voltage) ⁵	180 ± 15%	180 ± 10 % ⁷
	Luminous flux (in lm at 9 V DC) ⁵	40 min.	

^{1/} The reference plane is the plane defined by the contact points of the cap-holder fit.

^{2/} The reference axis is perpendicular to the reference plane and passing through the centre of the bayonet core.

^{3/} Light emitting area: to be checked by means of the box system in Figure 2

^{4/} A minimum free air space of 5 mm around the light source shall be respected for convection; the connector interface can be neglected.

^{5/} The emitted light shall be red.

^{6/} After continuous operation for 30 minutes at 23 ± 2.5° C.

^{7/} The measured value shall be in between 105 per cent and 90 per cent of the value measured after 1 minute.

^{8/} Light centre length; for the method of measurement, see Annex K of IEC 60809, Edition 4.

^{9/} The bounded area defined with the dimensions c, k and m defines the maximum outline in relation to the reference system

Electrical characteristics

In case of LED light source failure (no light emitted) the max. electrical current draw, when operated between 12 V and 14 V, shall be less than 20 mA (open circuit condition).

Screen projection requirements

The following test is intended to define the requirements for the light emitting area of the LED light source and to determine whether the light emitting area is correctly positioned relative to the reference axis and reference plane in order to check compliance with the requirements.

The position of the light emitting area is checked by the box system defined in Figure 2, which is aligned to the planes C₉₀ and C₁₈₀ and shows the projection when viewing along direction $\gamma = 0^\circ$ at $e = 3.0$ mm (C, γ as defined in Figure 3). The luminous flux Φ emitted into the viewing direction shall be calculated as given below:

$$\Phi = L \cdot S \cdot \Omega$$

with

S = area to be considered

L = luminance average of area S

Ω = solid angle defined by the entrance aperture of the measurement system

The distribution of luminous flux originating from the LEA as shown in Figure 2 shall fulfil the requirements given in Table 3. All numbers shall be given in % of the total luminous flux emitted into the viewing direction from the bayonet core area, i.e. a circular area with diameter $c = 18.5$ mm (see Figure 1).

Note: When evaluating the luminous flux distribution emitted from the LEA, reflections and stray light within the measurement equipment shall be reduced as much as possible and if necessary, corrected. More details regarding measurement of light-emitting areas can be found in the publication describing general photometry accuracy guidelines currently prepared by CIE TC2-67

Figure 2
Box definition of the light emitting area with dimensions as specified in Table 2

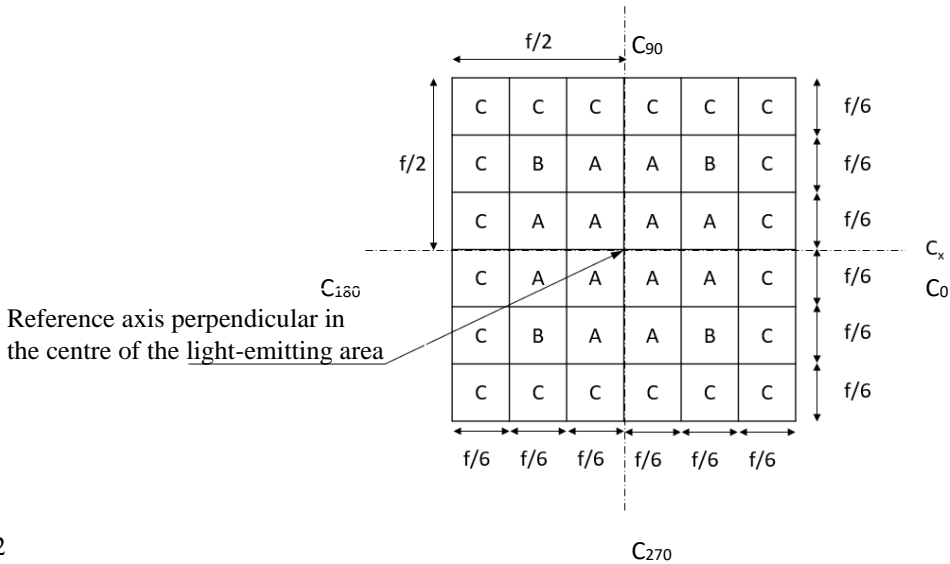


Table 2
Dimensions of the box system in Figure 2

Dimensions in mm	f
LED light sources of normal production	4.8
Standard LED light sources	4.8

Table 3

Proportion of the total luminous flux emitted into the viewing direction from the areas specified in Figure 2

<i>Area(s)</i>	<i>LED light sources of normal production</i>	<i>Standard LED light sources</i>
Each A individually	> 3% < 10 %	> 4% < 10%
Each B individually	> 3% < 10%	> 3% < 10%
All A and B together	> 70%	> 75%
Each C individually	< 2%	< 2%
All A, B and C together	> 90%	> 90%

Normalized luminous intensity distribution

The following test is intended to determine the normalized luminous intensity distribution of the light source in an arbitrary plane containing the reference axis. The intersection of the reference axis and the parallel plane to the reference plane in distance $e = 3.0 \text{ mm}$ is used as the coordinate system origin.

The light source is mounted on a flat plate with the corresponding mounting lug features. The plate is mounted to the goniometer table by a bracket, so that the reference axis of the light source lines up with one of the rotating axes of the goniometer. The corresponding measurement set-up is described in Figure 3.


Luminous intensity data is recorded with a standard photo-goniometer. The measurement distance should be chosen appropriately, to make sure that the detector is located in the far field of the light distribution.

The measurements shall be performed in C-planes C_0 , C_{90} , C_{180} and C_{270} , which contain the reference axis of the light source. The test points for each plane for multiple polar angles γ are specified in Table 4.


The measured luminous intensity values, normalised to the measured luminous flux of the individual light source under test, shall be converted to normalised luminous intensity values of a 1,000 lm light source. The data shall comply with the tolerance band as defined in Table 4.

The drawings are intended only to illustrate the essential set-up for measurement of the LED light source.

Figure 3
Set-up to measure the luminous intensity distribution

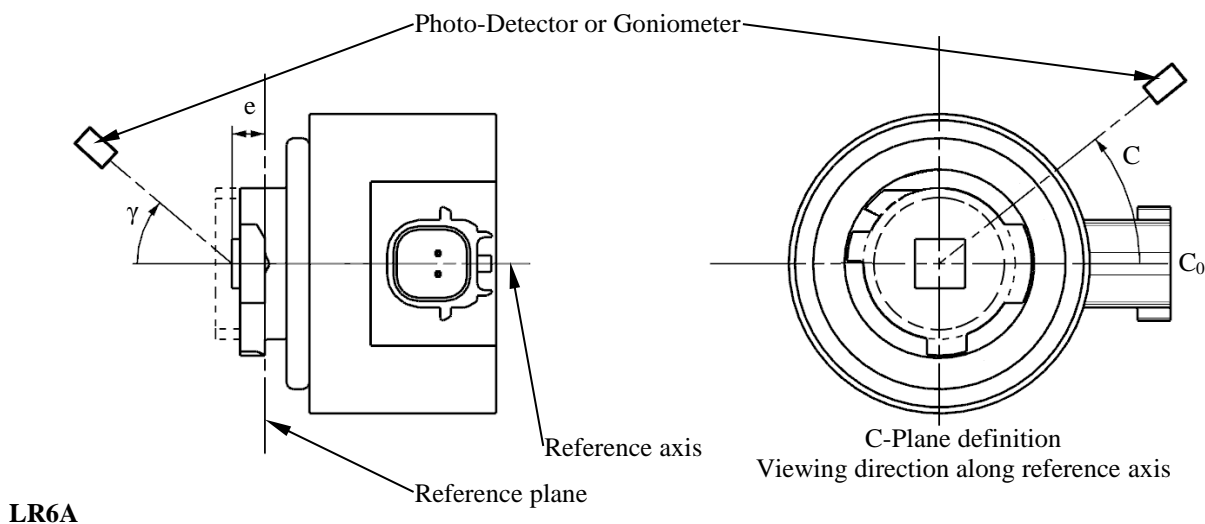

LR6A

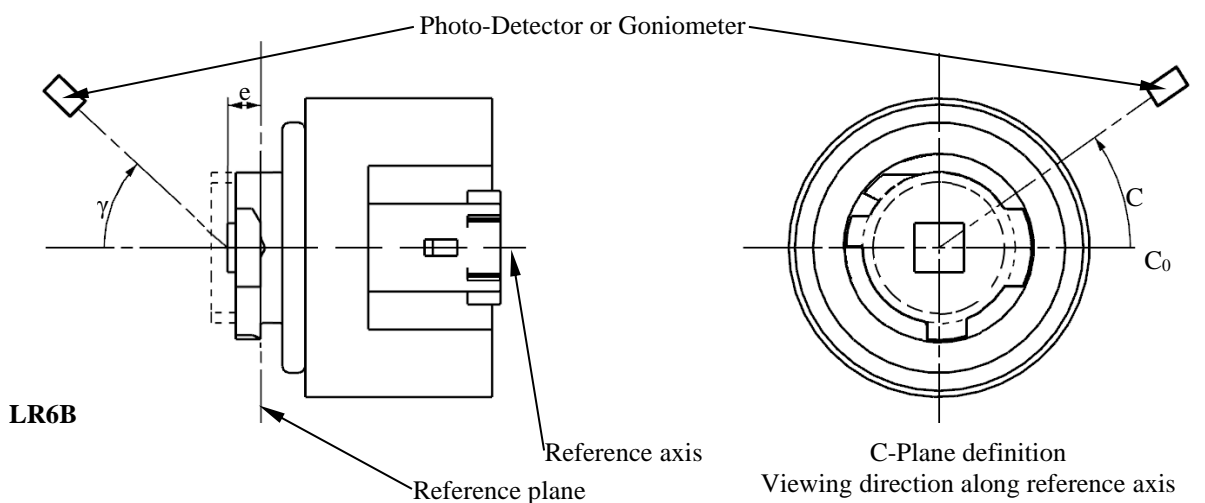

LR6B

The light pattern as described in Table 4 shall be substantially uniform, i.e. in between two adjacent grid points the relative luminous intensity requirement is calculated by linear interpolation using the two adjacent grid points. In case of doubt this may be checked in addition to verification of the grid points given in Table 4.

Table 4

Test point values of normalized intensities

<i>Angle γ</i>	<i>LED light sources of normal production</i>		<i>Standard LED light sources</i>	
	<i>Minimum Intensity in cd /1000 lm</i>	<i>Maximum Intensity in cd/1000 lm</i>	<i>Minimum Intensity in cd /1000 lm</i>	<i>Maximum Intensity in cd /1000 lm</i>
0°	200	425	250	390
15°	190	415	240	370
30°	170	380	220	335
45°	145	310	180	275
60°	85	245	105	220
75°	0	160	0	150
90°	0	70	0	65

"
